



Photo shows optional lens, occupancy sensor and EM kit

Product Features

- Integral Sensor and EM available
- Wide distribution (Up to 115 degree spread)
- High efficiency (146-155) lumens per watt
- Multiple Mounting options- Cable (Standard), Chain and pendant hanger ordered separately
- Available in 4000K or 5000K color temperature
- CRI over 80
- Dry or Damp Rated
- Operating Temperature: -4F to 122 F
- Field Replaceable Driver
- 0-10V DC dimming
- DLC Premium 4.0 listed (except 480V)
- Flicker Free
- Power Factor >0.9
- Input Voltage 120-277V (480V also available)
- 5 year warranty
- UL, RohS and FCC certified
- Optional frosted lens available for 120-277V units

Reference #	Model #	Lumens	Watts	Lm/W	CCT
61788	HBLI-7L-40K-UL	6884	52	132	4000
61792	HBLI-7L-40K-UL-OC	6884	52	132	4000
61789	HBLI-7L-50K-UL	6987	52	132	5000
61793	HBLI-7L-50K-UL-OC	6987	52	132	5000
61804	HBLI-14L-40K-UL	15054	108	139	4000
61812	HBLI-14L-40K-UL-OC	15054	108	139	4000
61816	HBLI-14L-40K-UL-EM	15054	108	139	4000
61820	HBLI-14L-40K-UL-OC-EM	15054	108	139	4000
61805	HBLI-14L-50K-UL	15200	109	140	5000
61813	HBLI-14L-50K-UL-OC	15200	109	140	5000
61817	HBLI-14L-50K-UL-EM	15200	109	140	5000
61821	HBLI-14L-50K-UL-OC-EM	15200	109	140	5000
61824	HBLI-21L-40K-UL	22493	164	137	4000
61832	HBLI-21L-40K-UL-OC	22493	164	137	4000
61836	HBLI-21L-40K-UL-EM	22493	164	137	4000
61840	HBLI-21L-40K-UL-OC-EM	22493	164	137	4000
61828	HBLI-21L-40K-UH-F	20303	163	137	4000
61825	HBLI-21L-50K-UL	22582	164	137	5000
61833	HBLI-21L-50K-UL-OC	22582	164	137	5000
61837	HBLI-21L-50K-UL-EM	22582	164	137	5000
61841	HBLI-21L-50K-UL-OC-EM	22582	164	137	5000
61829	HBLI-21L-50K-UH-F	20384	163	125	5000
61848	HBLI-29L-40K-UH-F	26339	219	120	4000
61845	HBLI-29L-50K-UL	30407	224	136	5000
61853	HBLI-29L-50K-UL-OC	30407	224	136	5000
61857	HBLI-29L-50K-UL-EM	30407	224	136	5000
61849	HBLI-29L-50K-UH-F	26656	219	122	5000
61865	HBLI-39L-50K-UL	40460	294	137	5000
61873	HBLI-39L-50K-UL-OC	40460	294	137	5000
61877	HBLI-39L-50K-UL-EM	40460	294	137	5000
61881	HBLI-39L-50K-UL-OC-EM	40460	294	139	5000


OC = Occupancy Sensor

EM = Emergency Back-up

F = Frosted Lens


Options

62043	LS 1 (HBLI-7L)	Frosted Lens
62044	LS 2 (HBLI-14L, 21L)	Frosted Lens
62045	LS 3 (HBLI-29L, 39L)	Frosted Lens
62039	CM	Chain Mount
62040	SM	Ceiling Mount
62041	PM 1 (HBLI-7L and 14L)	Stem Mount
62042	PM 2 (HBLI-21L, 29L, and 39L)	Stem Mount
62046	WGL 1 (HBLI-7L)	Wire Guard
62047	WGL 2 (HBLI-14L, 21L)	Wire Guard
62048	WGL 3 (HBLI-29L, 39L)	Wire Guard

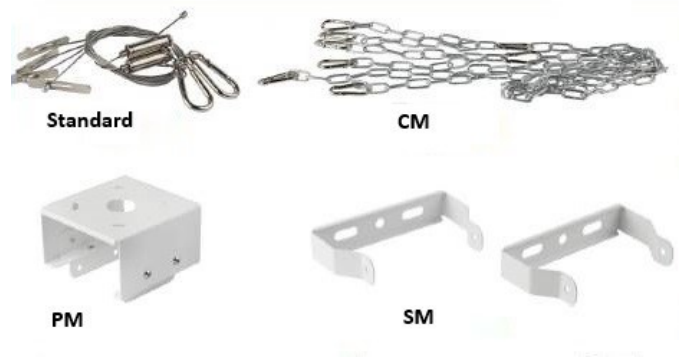

Occupancy and EM options available, see Model # on Page 2

Dimensions

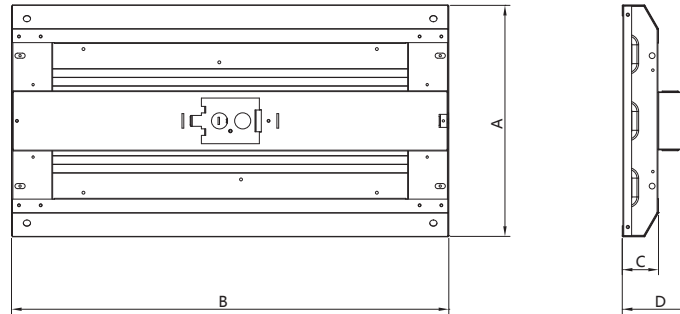

Model #	Lumens	Watts	Lm/W	CCT	A width	B length	C height	D height with Ceiling/Stem option
HBLI-7L-xxK-UL	6884	52	132	4000	10.24"	11.81"	2.20"	3.94"
HBLI-14L-xxK-UL	15054	108	139	4000	10.24"	23.62"	2.20"	3.94"
HBLI-21L-xxK-UL	22493	164	137	4000	11.81"	23.62"	2.36"	4.09"
HBLI-29L-xxK-UH-F	26339	219	120	4000	11.81"	47.24"	2.36"	4.09"
HBLI-39L-xxK-UL	40460	294	137	5000	11.81"	47.24"	2.36"	4.09"