




## Product Features

- Wide distribution (120 degree spread)
- High efficiency (146-155) lumens per watt
- Multiple Mounting options- Chain, Cable and pendant hanger
- Included with fixture
- Available in 4000K or 5000K color temperature
- CRI over 80
- Dry or Damp Rated
- Operating Temperature: (Need data)
- Dimensions: 23.8" x 12.6" x 3.62"  
45.9" x 12.6" x 3.62"
- Field Replaceable Driver
- 0-10V DC dimming
- LM79/80 and TM 21 Data Available
- DLC Premium 4.0 listed
- Flicker Free
- Power Factor >0.9
- Input Voltage 120-277V
- 7 year warranty
- UL, RohS and FCC certified

Reference #	Model #	Lumens	Watts	Lm/W	CCT	CRI	Dimmable
61072	HBL-16L-40K-UL	15909	105	152	4000	>80	Yes
61073	HBL-16L-50K-UL	16073	104	155	5000	>80	Yes
61074	HBL-30L-40K-UL	30316	212	143	4000	>80	Yes
61075	HBL-30L-50K-UL	30684	211	145	5000	>80	Yes
61076	HBL-32L-40K-UL	31433	213	148	4000	>80	Yes
61077	HBL-32L-50K-UL	32042	214	150	5000	>80	Yes
61078	HBL-48L-40K-UL	47694	324	147	4000	>80	Yes
61079	HBL-48L-50K-UL	48185	322	150	5000	>80	Yes

## Product Dimension


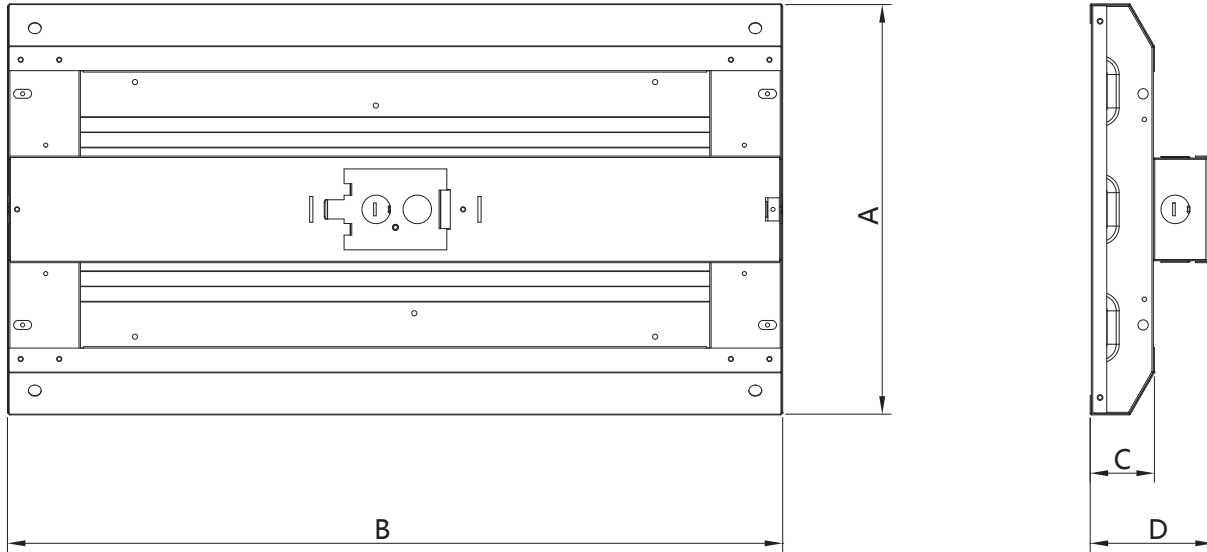


Part No.	A	B	C	D
HBL-14L	12.60"	23.82"	1.97"	3.78"
HBL-29L	17.32"	23.82"	1.97"	3.78"
HBL-30L	12.60"	45.87"	1.97"	3.78"
HBL-42L	17.32"	45.87"	1.97"	3.78"

## Specification

Name	Size	Part No.	Power	Input Voltage	PF	LED Strip	Light Efficacy	CCT	Ra
Linear high bay	0.6M	HBL-14L	110W	AC120-277V	>0.9	4	130lm/W	4000K 5000K	80
		HBL-29L	220W	AC120-277V	>0.9	6			
	1.2M	HBL-30L	225W	AC120-277V	>0.9	4			
		HBL-42L	320W	AC120-277V	>0.9	6			

## Testing Report

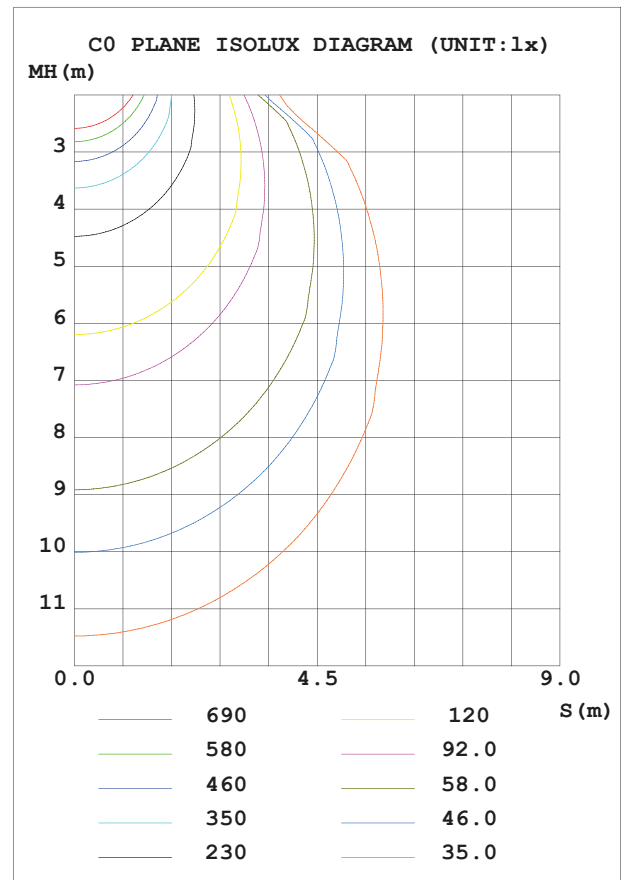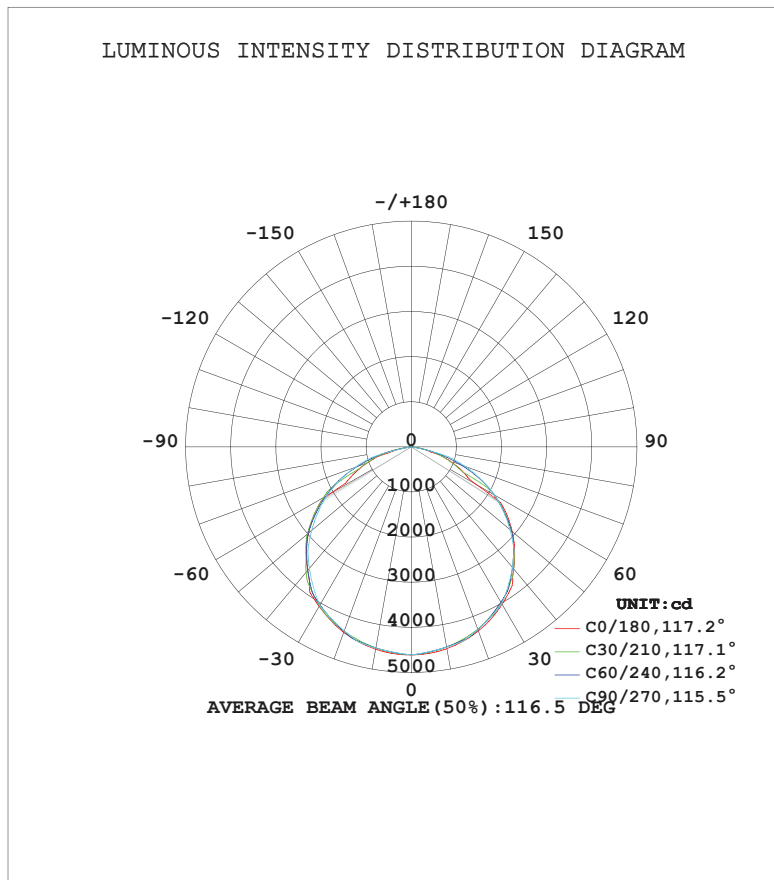


## Installation method:


- 1 Carefully unpack the fixture from its packaging. Inspect product for defects due to shipping.



- 2 Turn off power to appropriate circuit at the breaker panel.




- 3a Attach the provided chain securely to the included wire hangers, then insert the wire hangers into the slotted holes, as shown below, located on top of both sides of the fixture.

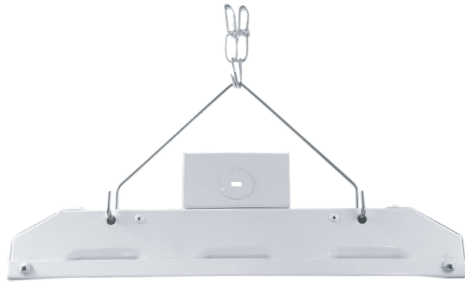


Chain Kit

- 3b Place pendant hanger on the fixture as shown below. Align screw holes and bolt the bracket to the fixture using the provided hardware.

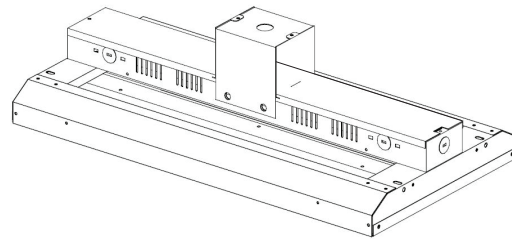


### Wiring Diagram

Attach fixture to conduit securely and make wiring connections (see wiring instructions below).

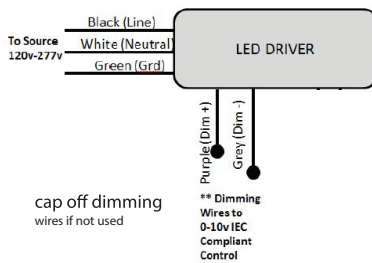

- 4b Once the connections are made, attach both face plates to the mounting bracket using the provided hardware.

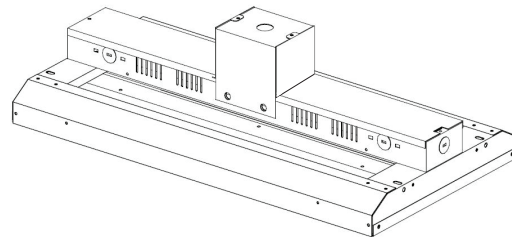

Pendant Kit

## Packing /weight

Part NO.	Outer Carton Size (L×W×H)	Qty/Carton (pcs)	Net weight	Gross weight
HBL-14L	(26.38''*15.94''*5.91'') (670*405*150mm)	1	4.7kg	7.3kg
HBL-29L	(26.38''*20.67''*5.91'') (670*525*150mm)	1	6.5kg	9.2kg
HBL-30L	(48.43''*15.94''*5.91'') (1230*405*150mm)	1	9.5kg	12.5kg
HBL-42L	(48.43''*20.67''*5.91'') (1230*525*150mm)	1	12.0kg	15.1kg

## Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.Working temperature: -20°C~40°C, storage temperature: -30°C~60°C.