

Features

- Frosted lens to reduce glare
- Instant on to full brightness
- High efficacy at 103-108 lumens per watt
- Available 3500K, 4000K, and 5000K color temperatures
- Suitable for damp locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Superior heat management yields 60,000 hours life
- LM79/80 reports and TM21 data available
- Lower maintenance costs
- Dimensions 47.7" x 23.7" x 4.3"
- 0-10 V DC dimming standard

- UL, DLC, RoHS and FCC certified
- Ultra lightweight for easy installation
- Isolated type power driver is shock and fire resistant
- 7 year warranty
- Input Voltage 120-277V
- Workable Voltage 90-305V


Applications

- Office
- Workshop
- Warehouse
- Indoor area lighting
- Healthcare Facilities
- Schools
- Retail stores

Items Stocked in Illinois Warehouse

Model No.	SKU Number	Lumens	CRI	Weight (lbs)	Color Temperature(K)	Watts	Lumens Per Watt
51118	TR24-50L-35K-NV-ID	5155	>80	15.21	3500	49.6	103
51119	TR24-50L-40K-NV-ID	5367	>80	15.21	4000	49.6	108



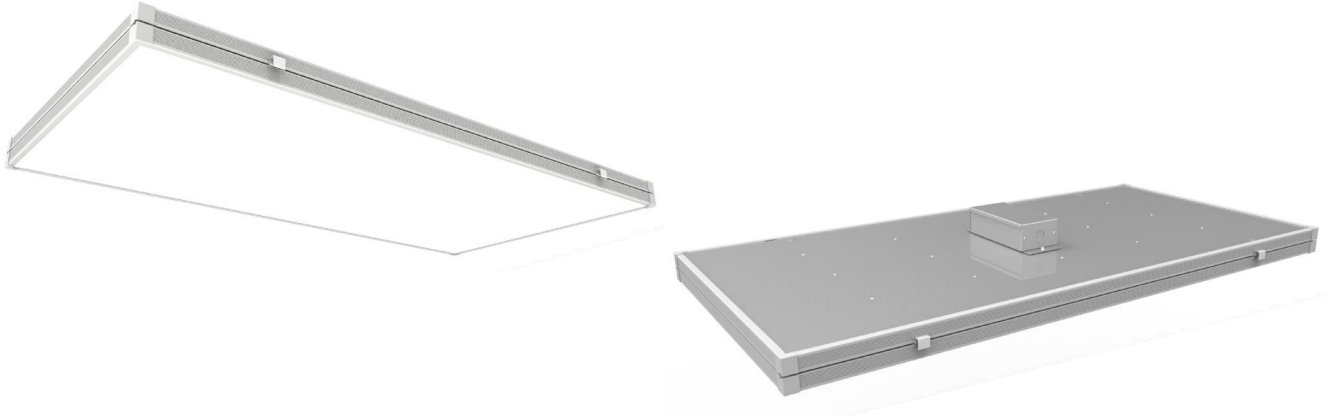

Features

- Frosted lens to reduce glare
- Instant on to full brightness
- High efficacy at 100 lumens per watt
- Available 4000k and 5000k color temperatures
- Suitable for damp locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Superior heat management yields 60,000 hours life
- Case quantity: 2 per box
- Lower maintenance costs
- Dimensions 47.7" x 23.7" x 2.3"
- 0-10 V DC dimming standard
- UL, DLC, RoHs and FCC certified
- Ultra lightweight for easy installation
- Isolated type power driver is shock and fire resistant
- 7 year warranty
- Workable Voltage 90-305V

Applications

- Office
- Workshop
- Indoor area lighting

Model No.	SKU Number	Lumens	CRI	Weight (lbs)	Voltage	Color Temperature(K)	Lumen Maintenance (HR)	Watts	Lumens Per Watt
51122	TR24-8L-40K-NV	8000	>80	13.4	100-277	4000	50,000	80.0	100
51123	TR24-8L-50K-NV	8000	>80	13.4	100-277	5000	50,000	80.0	100

