



Features:

- Forward throw and downlight design for maximum light coverage
- Polycarbonate double-sided Fresnel lens for superior light distribution
- 7-year warranty
- Modular construction of driver and light source for easy installation and field-replaceable driver
- Power Factor >0.9
- Operating temperature -20° - +50° C/ -4° - +122°F
- Photocell option available
- Ambient temperature
- LM79/70 report and TM21 data available


Applications:

- Warehouses
- Sports stadiums
- Industrial settings
- Architectural lighting
- Parking structures
- Pathways


Model	SKU Number	Lumens	CRI	Voltage	Color Temp (K)	Watts	Lumens Per Watt	Wattage Equivalent
53055	WP-4L-55K-NV	3,918	>70	120-277V	5500	57	68	100W HID
53056	WP-6L-55K-HV	5,838	>70	347-480V	5500	84	70	175W HID
53057	WP-9L-55K-NV	8,561	>70	120-277V	5500	120	72	250W HID
53058	WP-10L-55K-HV	10,359	>70	347-480V	5500	150	69	400W HID




UNIT DIMENSIONS

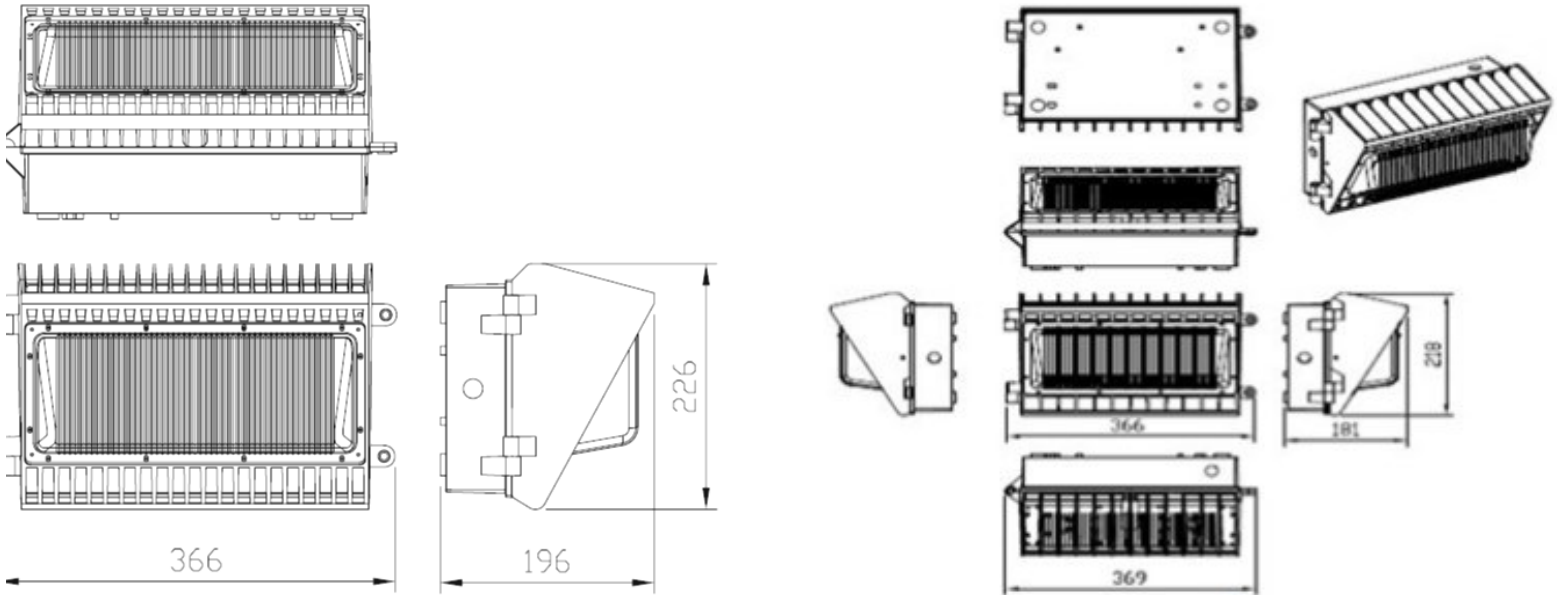

BEAM ANGLE

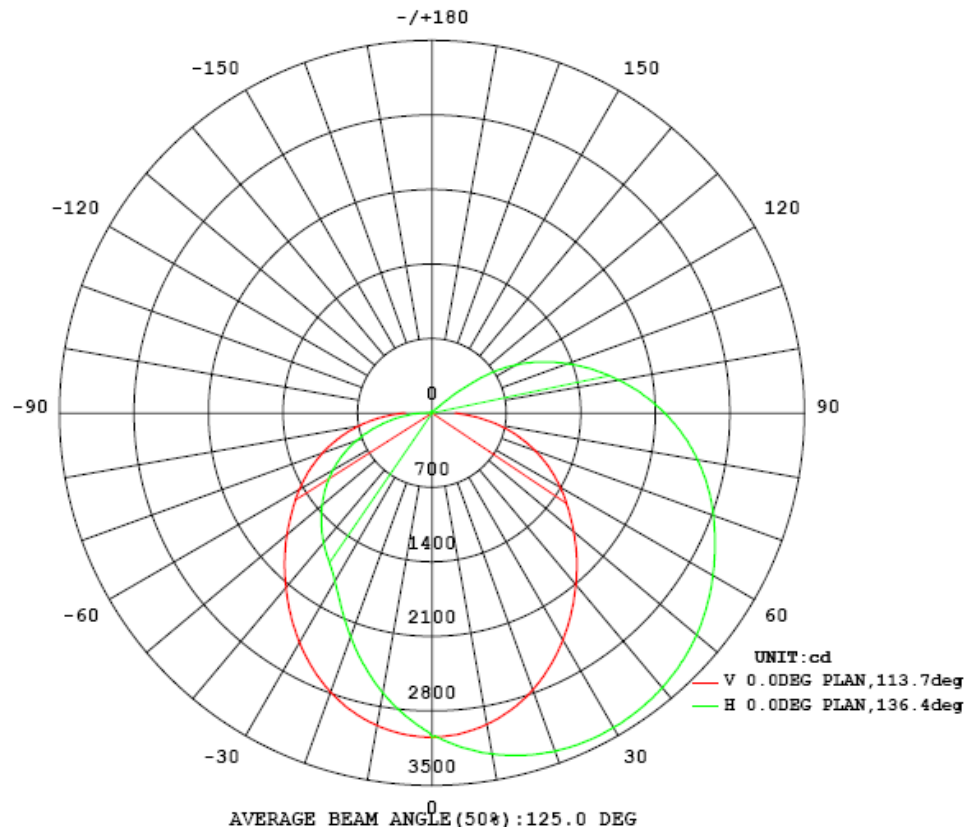


1




Attach power box to wall

2




Open connection box and insert external power cable through PG connector. Connect wire and close connection box

3



Align opening in luminaire with rotating shaft in power box and insert

4



Tighten side screw

- **Improper installation may void warranty. Follow all installation instructions**
- To prevent electrical shock, cut off power before installation
- Ensure wall can support weight of luminaire
- Do not use where exposed to corrosive gases
- Do not cover luminaire
- For safe operation luminaire must be properly grounded

