


## Features:

- Lens material is PMMA acrylic for improved performance and durability
- cETLus, DLC, and FCC certified
- Flicker free driver
- 0-10V dimming
- Aluminum Alloy Frame
- Installation methods: Recessed, Suspended, Surface-mounted
- Battery Backup available
- Rated for damp locations
- Ceiling mount frame kit available - #61655(2x2) and #61657(2x4)
- **Input Voltage** : 120 - 277 VAC
- **Power** : 30W - 60W
- **Frequency** : 50 / 60 Hz
- **Lummen Efficacy** : 110 lumens per watt
- **Operating Temperature** : -25°F - + 40°C
- **Power Factor** : >0.9
- **THD**: <20%
- 5 year warranty
- CRI>80

Model Number	Reference #	Lumens	Color Temp (°K)	Watts	Lm/W	Input Voltage
FPT14-4L-50K-UL	60735	4181	5000	38	110	120-277 V
FPT22-4L-40K-UL-DM-B	60862	4316	4000	38	105	120-277 V
FPT22-4L-50K-UL-DM-B	60737	5145	5000	38	109	120-277 V
FPT22-5L-50K-UL	60738	5450	5000	47	115	120-277 V
FPT24-5L-40K-UL-DM-B	60863	5482	4000	48	115	120-277 V
FPT24-5L-40K-UL-DM-B-EM	60861	5526	4000	48	115	120-277 V
FPT24-5L-50K-UL-DM-B	60739	6549	5000	48	120	120-277 V
FPT24-6L-50K-UL	60740	6942	5000	59	114	120-277 V

## Product Dimension

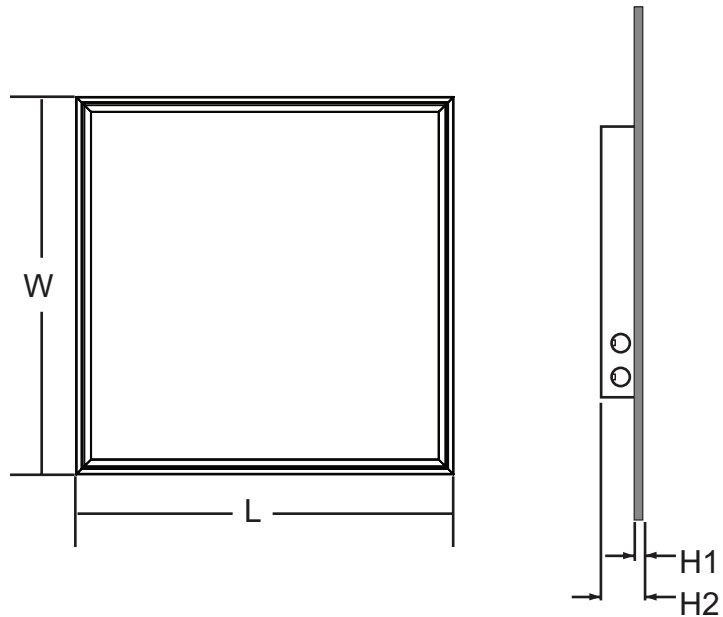

Part No.	Size(ft)	Outline Dimension(Inches)			
		L	W	H1	H2
FPT22-X-XXK-UL	2' × 2'	23.74"	23.74"	.39"	1.97"
FPT14-X-XXK-UL	1' × 4'	47.71"	11.85"	.39"	1.97"
FPT24-X-XXK-UL	2' × 4'	47.71"	23.74"	.39"	1.97"

## Packing /weight

Model	Carton Size (L*W*H) inches	QTY PCS	Single N.W. lbs	FCL G.W. lbs
2x2	28.15" * 27.96" * 3.93"	2	8.4	23.4
1x4	51.78" * 16.34" * 3.93"	2	9.3	25.4
2x4	51.78" * 28.35" * 3.93"	2	15.1	38.6

# 2x4 FPT24-5L-XXK-UL

