




Street/Area Light with Adjustable Knuckle



**Key Features**

- 7 year warranty
- Standard 10kV surge protector
- Instant on to full brightness
- High efficacy: 130-140 lumens per watt
- 100,000 hours rated life
- Easy installation
- Easy access panel for repairs
- Photocell option available
- Distribution Pattern Types II, III, IV, V
- ETL, RoHS, & FCC approved
- LM79 and LM80 reports available
- Light grey color standard (other colors available)
- IP66 Rated for wet locations
- 0-10V dimming option available
- Fixture comes standard with 2 3/8" slip fitter, contact factory for other mounting options
- Silver color housing is standard; other colors available, contact the factory.


**Specifications**

- Height: 3 2/5 inches
- Base Width: 11 1/2 inches
- Base Length: 13 2/5 to 29 1/4 inches
- Input Voltage: 120-277V or 347-480V
- Lumens: 3,000-33,000 (70W-1000W HID Equiv)
- Watts: 23-220
- Efficacy: 130-140 lumens per watt
- CCT: 4000K and 5000K
- CRI: >70
- Type II, III, IV, V distribution available
- Operating Temperature: -40°-140° F
- Weight: 9-20 pounds

Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Total Lamp Lumens	LLF	Description
⊕	4	STL-54015	4 @ 90 DEGREES	28743	0.950	SLA-27L-50K-UL-NPC-DM

Calculation Summary						
Label	Units	Avg	Max	Min	Avg/Min	Max/Min
Parking Area measured AFG	Fc	2.31	5.4	0.6	3.85	9.00

Mounting Height: 35 feet AFG

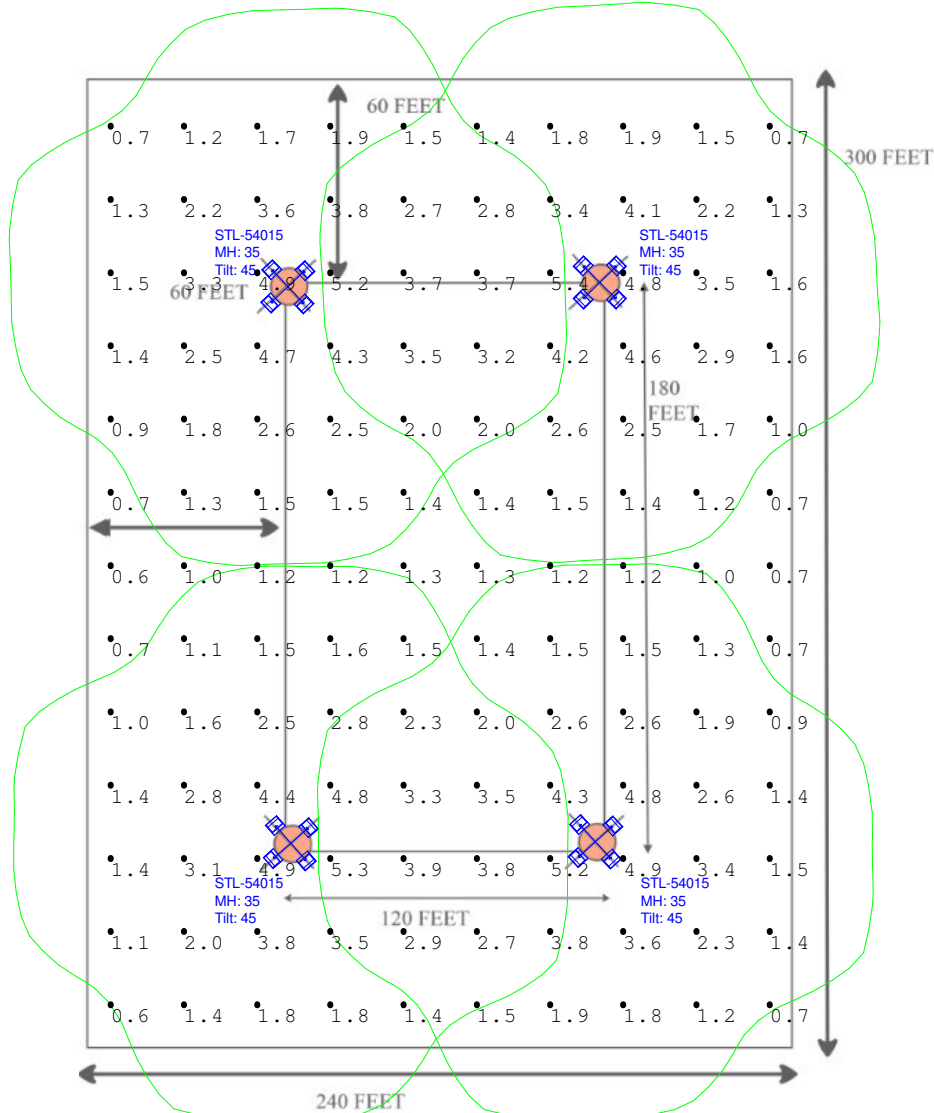

Customer responsible to verify ordering information/catalogue number prior to placing order



Drawn By: Nick Harms
Checked By: NAH
Date: 3/14/2017

**240' x 300'  
Parking Area**