

# CLAW (Contractor LED Array Watt Saver) Retrofit



## Features :

- Low cost LED troffer retrofit kit
- Long Life 60,000 hours LEDs at L80 for reduced maintenance
- 80 CRI 4K & 5K in stock
- Available in 2x4, 2x2 and 1x4 configuration
- Lumen packages ranging 2200-6500 lumens
- Efficacy up to 130 LPW
- Input Voltage 120-277V
- Pre-wired components for easy installation and maintenance
- Compatible with most lighting control systems
- 0-10V dimming standard
- Power factor > 0.9
- Units held in place with magnets for flexible placement
- May be used in exterior signage for easy retrofit opportunities
- Number of LED strips can be reduced if needed when installing


- DLC Standard 4.0, ETL, IC, LM79 and LM80 Certified
- 5 year warranty
- Strip dimension:
  - 1.11" x 41.74"
  - 1.11" x 20.87"
- Quantity per carton 20 pcs

## Applications:


- Commercial offices
- Educational facilities
- Retail
- Healthcare applications
- Signage

| Reference # | New Model Number | Lumens | Watts | Lm/W | CCT (K) | Length (in) | # of LED Strips |
|-------------|------------------|--------|-------|------|---------|-------------|-----------------|
| 60760       | STRK22-2L-40K-UL | 2200   | 20    | 110  | 4000    | 21          | 3               |
| 60761       | STRK22-4L-40K-UL | 3300   | 30    | 110  | 4000    | 21          | 3               |
| 60762       | STRK22-5L-40K-UL | 4400   | 40    | 110  | 4000    | 21          | 3               |
| 60763       | STRK24-5L-40K-UL | 4400   | 40    | 110  | 4000    | 42          | 3               |
| 60764       | STRK24-6L-40K-UL | 5500   | 50    | 110  | 4000    | 42          | 3               |
| 60870       | STRK22-2L-50K-UL | 2600   | 20    | 130  | 5000    | 21          | 3               |
| 60871       | STRK22-4L-50K-UL | 3900   | 30    | 130  | 5000    | 21          | 3               |
| 60872       | STRK22-5L-50K-UL | 5200   | 40    | 130  | 5000    | 21          | 3               |
| 60873       | STRK24-5L-50K-UL | 5200   | 40    | 130  | 5000    | 42          | 3               |
| 60874       | STRK24-6L-50K-UL | 6500   | 50    | 130  | 5000    | 42          | 3               |


## Testing Report:

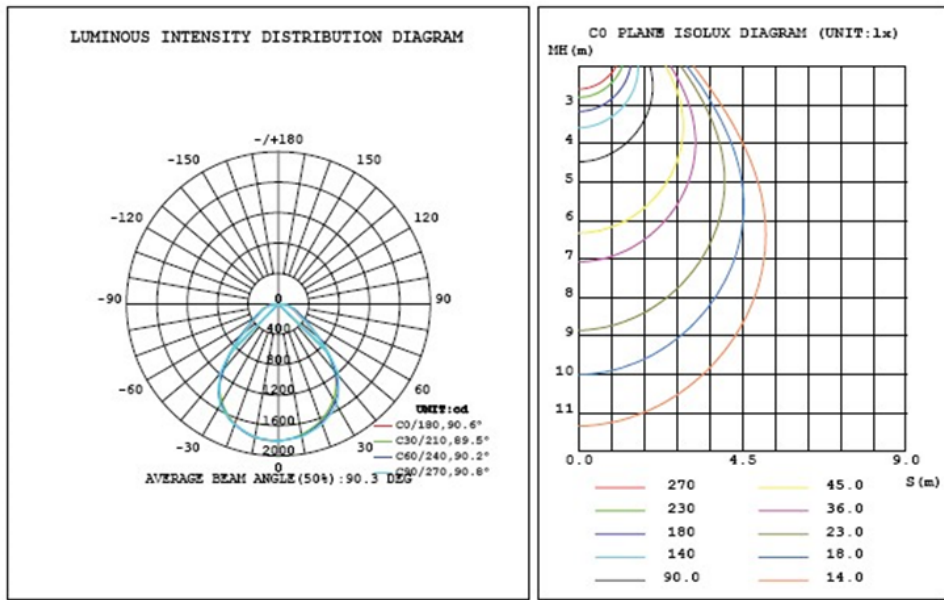


## Installation instruction:

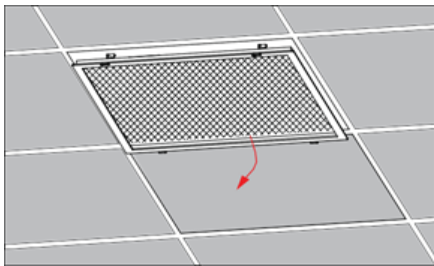


1. Compatible with most 2 lamp and 4 lamp fluorescent fixtures. To avoid the possibility of electric shock, turn off power.

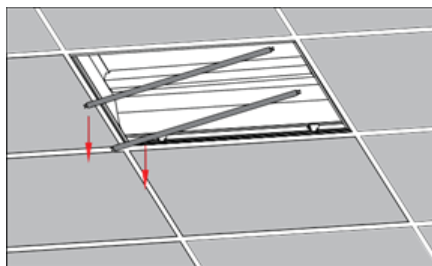


2. Open the troffer and remove existing lamps, lamp sockets, ballast, any other components.

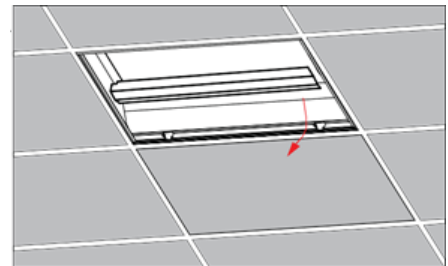

3. Connect wires

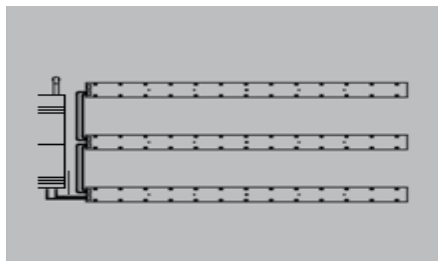

4. Align LED strip and connect driver

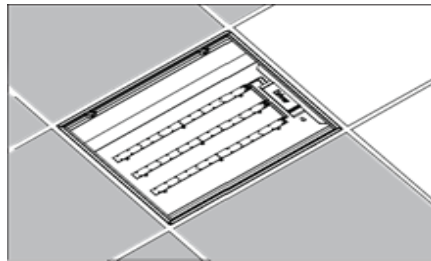

5. Close the lid and turn on the power supply

